
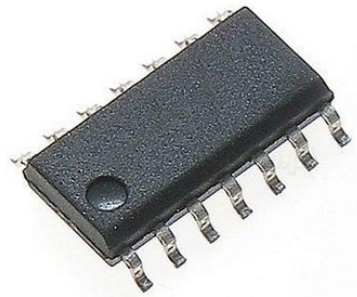


## Standard Timer Dual -20°C 85°C 14-Pin SOIC N

|                      |  |
|----------------------|--|
| <b>Manufacturer:</b> | <a href="#">Maxim Integrated</a>   |
| <b>Package/Case:</b> | SOP-14   |
| <b>Product Type:</b> | Clock & Timer ICs  |
| <b>RoHS:</b>         | RoHS Compliant/Lead free  |
| <b>Lifecycle:</b>    | Active   |



Images are for reference only

[Inquiry](#)

### General Description

The ICM7555 and ICM7556 are CMOS RC timers providing significantly improved performance over the standard SE/NE 555/556 and 355 timers, while at the same time being direct replacements for those devices in most applications. Improved parameters include low supply current, wide operating supply voltage range, low Threshold, Trigger and Reset currents, no crowbarring of the supply current during output transitions, higher frequency performance and no requirement to decouple Control Voltage for stable operation. Specifically, the ICM7555 and ICM7556 are stable controllers capable of producing accurate time delays or frequencies. The ICM7556 is a dual ICM7555, with the two timers operating independently of each other, sharing only V+ and GND. In the one shot mode, the pulse width of each circuit is precisely controlled by one external resistor and capacitor. For astable operation as an oscillator, the free running frequency and the duty cycle are both accurately controlled by two external resistors and one capacitor. Unlike the regular bipolar SE/NE 555/556 devices, the Control Voltage terminal need not be decoupled with a capacitor. The circuits are triggered and reset on falling (negative) waveforms, and the output inverter can source or sink currents large enough to drive TTL loads, or provide minimal offsets to drive CMOS loads.

### Key Features

Supply voltage range is 2V to 18V

Operating temperature range from -20°C to 85°C

Improved 2nd source

No crow-barring of supply during output transition

Adjustable duty cycle

TTL compatible

Monolithic, low power CMOS design

Threshold voltage of 0.66V

Maximum oscillator frequency fmax is 500KHz(min)

### Recommended For You

**ICM7555ISA**

Maxim Integrated

SOP-8

**ICM7556IPD**

Maxim Integrated

DIP

**ICM7555IPA+**

Maxim Integrated

DIP

**ICM7240IPE+**

Maxim Integrated

DIP16

**ICM7555ISA+**

Maxim Integrated

SOP8

**ICM7556IPD+**

Maxim Integrated

DIP14

**ICM7555ESA-T**

Maxim Integrated

SOIC-8

**ICM7242IPA+**

Maxim Integrated

DIP-8

**ICM7555ISA+T**

Maxim Integrated

SOP-8

**ICM7240IWE+**

Maxim Integrated

SOP16

**ICM7555MJA/HR**

Maxim Integrated

SMDSMT

**ICM7555ESA+**

Maxim Integrated

SOP8

**ICM7250IPE+**

Maxim Integrated

Correctoriginal

**ICM7555ITV**

Maxim Integrated

CAN8

**DS1023-500**

Maxim Integrated

SOP16