


Op Amp Dual Low Noise Amplifier R-R O/P $\pm 8V/16V$ 8-Pin SOIC Tube

Manufacturer:	Texas Instruments, Inc
Package/Case:	SOP-8
Product Type:	Amplifier ICs
RoHS:	RoHS Compliant/Lead free 
Lifecycle:	Active



Images are for reference only

[Inquiry](#)

General Description

The TLC2262 and TLC2264 are dual and quadruple operational amplifiers from Texas Instruments. Both devices exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. The TLC226x family offers a compromise between the micropower TLC225x and the ac performance of the TLC227x. It has low supply current for battery-powered applications, while still having adequate ac performance for applications that demand it. The noise performance has been dramatically improved over previous generations of CMOS amplifiers. Figure 1 depicts the low level of noise voltage for this CMOS amplifier, which has only 200 μA (typ) of supply current per amplifier.

The TLC226x, exhibiting high input impedance and low noise, are excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single or split supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLC226xA family is available and has a maximum input offset voltage of 950 μV . This family is fully characterized at 5 V and ± 5 V.

The TLC2262/4 also makes great upgrades to the TLC27M2/L4 or TS27M2/L4 in standard designs. They offer increased output dynamic range, lower noise voltage and lower input offset voltage. This enhanced feature set allows them to be used in a wider range of applications. For applications that require higher output drive and wider input voltage range, see the TLV2432 and TLV2442. If your design requires single amplifiers, please see the TLV2211/21/31 family. These devices are single rail-to-rail operational amplifiers in the SOT-23 package. Their small size and low power consumption, make them ideal for high density, battery-powered equipment.

Key Features

Output Swing includes Both Supply Rails

Low Noise...12 nV/

Hz\ Typ at $f = 1 \text{ kHz}$

Low Input Bias Current...1 pA Typ

Fully Specified for Both Single-Supply and Split-Supply Operation

Low Power...500 uA Max

Common-Mode Input Voltage Range Includes Negative Rail

Low Input Offset Voltage


950 uV Max at $T_A = 25^\circ\text{C}$ (TLC2262A)

Macromodel Included

Performance Upgrade for the TS27M2/M4 and TLC27M2/M4

Available in Q-Temp Automotive
HighRel Automotive Applications
Configuration Control/Print Support
Qualification to Automotive Standards

Advanced LinCMOS is a trademark of Texas Instruments.

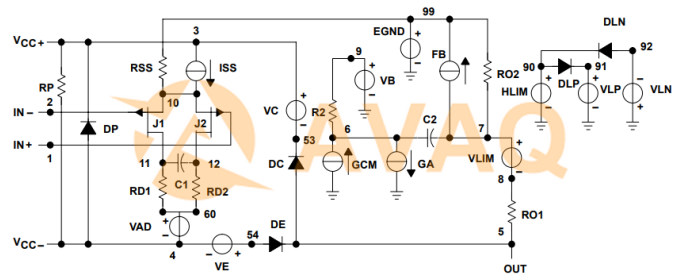

Recommended For You

TLC27M2CP

Texas Instruments, Inc

DIP8

TLV3501AIDR

Texas Instruments, Inc

SOP8

TL071ACP

Texas Instruments, Inc

DIP-8

TL062CDR

Texas Instruments, Inc
SOP8

TLE2142IP

Texas Instruments, Inc
DIP8

TLC272AID

Texas Instruments, Inc
SOP-8

TLV3502AQDCNRQ1

Texas Instruments, Inc
SOT23-8

TL084CD

Texas Instruments, Inc
SOP14

TLV2711DBVR

Texas Instruments, Inc
SOT23-5

TLC074CD

Texas Instruments, Inc
SOP14

TLC2272ACD

Texas Instruments, Inc
SOP-8

TLC2272AIDR

Texas Instruments, Inc
SOP8

TLV2462ID

Texas Instruments, Inc
SOP-8

TLV2471QDBVRQ1

Texas Instruments, Inc
SOT23-5

TLV23811DBVR

Texas Instruments, Inc
SOT23-5