


Standard Timer Dual -20°C 85°C 14-Pin PDIP N

Manufacturer:	<u>Maxim Integrated</u>
Package/Case:	DIP
Product Type:	Clock & Timer ICs
Lifecycle:	Obsolete

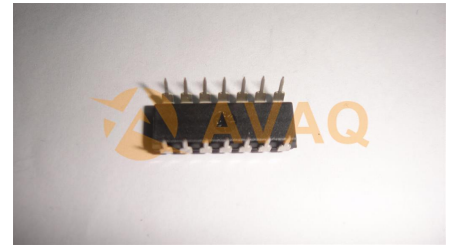

Images are for reference only

[Inquiry](#)

General Description

The ICM7555 and ICM7556 are CMOS RC timers providing significantly improved performance over the standard SE/NE 555/556 and 355 timers, while at the same time being direct replacements for those devices in most applications. Improved parameters include low supply current, wide operating supply voltage range, low Threshold, Trigger and Reset currents, no crowbarbing of the supply current during output transitions, higher frequency performance and no requirement to decouple Control Voltage for stable operation. Specifically, the ICM7555 and ICM7556 are stable controllers capable of producing accurate time delays or frequencies. The ICM7556 is a dual ICM7555, with the two timers operating independently of each other, sharing only V+ and GND. In the one shot mode, the pulse width of each circuit is precisely controlled by one external resistor and capacitor. For astable operation as an oscillator, the free running frequency and the duty cycle are both accurately controlled by two external resistors and one capacitor. Unlike the regular bipolar SE/NE 555/556 devices, the Control Voltage terminal need not be decoupled with a capacitor. The circuits are triggered and reset on falling (negative) waveforms, and the output inverter can source or sink currents large enough to drive TTL loads, or provide minimal offsets to drive CMOS loads.

Key Features

Exact equivalent in most cases for SE/NE 555/556 or TLC555/556

Low supply current

ICM7555: 60 μ A

ICM7556: 120 μ A

Extremely low input currents: 20pA

High speed operation: 1MHz

Guaranteed supply voltage range: 2V to 18V

Temperature stability: 0.005%/ $^{\circ}$ C at +25 $^{\circ}$ C

Normal reset function - no crowbarring of supply during output transition

Can be used with higher impedance timing elements than regular 555/556 for longer RC time constants

Timing from microseconds through hours



Operates in both astable and monostable modes

Adjustable duty cycle

High output source/sink driver can drive TTL/CMOS

Outputs have very low offsets, HIGH and LOW

Pb-free (RoHS Compliant)

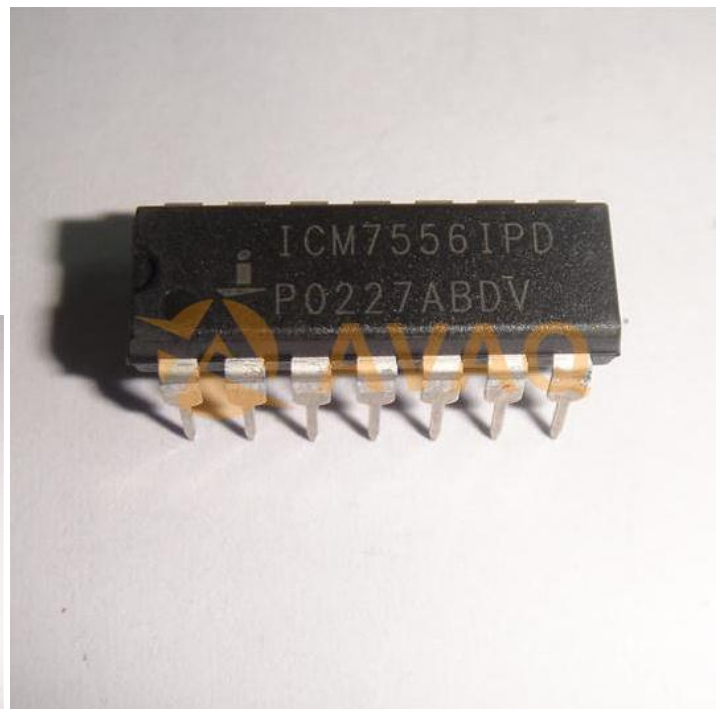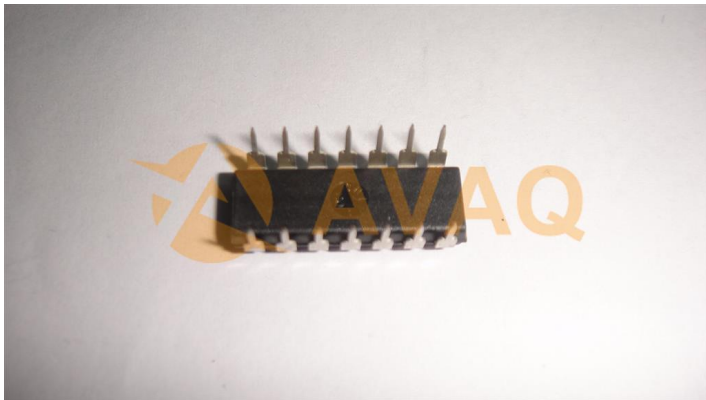

Recommended For You

ICM7555ISA

Maxim Integrated

SOP-8

ICM7555IPA+

Maxim Integrated

DIP

ICM7240IPE+

Maxim Integrated

DIP16

ICM7555ISA+

Maxim Integrated

SOP8

ICM7556IPD+

Maxim Integrated

DIP14

ICM7556ISD+

Maxim Integrated

SOP-14

ICM7555ESA-T

Maxim Integrated

SOIC-8

ICM7242IPA+

Maxim Integrated

DIP-8

ICM7555ISA+T

Maxim Integrated

SOP-8

ICM7240IWE+

Maxim Integrated

SOP16

ICM7555MJA/HR

Maxim Integrated

SMDSMT

ICM7555ESA+

Maxim Integrated

SOP8

ICM7250IPE+

Maxim Integrated

Correctoriginal

ICM7555ITV

Maxim Integrated

CAN8

DS1023-500

Maxim Integrated

SOP16