
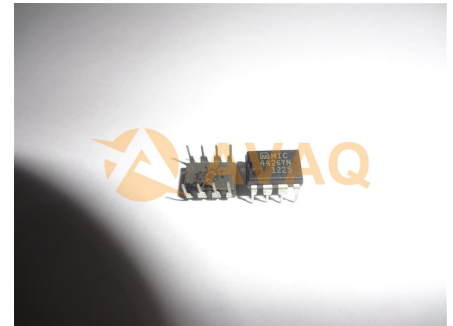


Driver 0.025V 1.5A 2-OUT Low Side Inv 8-Pin PDIP Tube

Manufacturer:	<u>Microchip Technology, Inc</u>
Package/Case:	DIP8
Product Type:	Drivers
RoHS:	RoHS Compliant/Lead free 
Lifecycle:	Active



Images are for reference only

[Inquiry](#)

General Description

The MIC4426/4427/4428 family are highly-reliable dual low-side MOSFET drivers fabricated on a BiCMOS/DMOS process for low power consumption and high efficiency. These drivers translate TTL or CMOS input logic levels to output voltage levels that swing within 25mV of the positive supply or ground. Comparable bipolar devices are capable of swinging only to within 1V of the supply. The MIC4426/7/8 is available in three configurations: dual inverting, dual noninverting, and one inverting plus one noninverting output. The MIC4426/4427/4428 are pin-compatible replacements for the MIC426/427/428 and MIC1426/1427/1428 with improved electrical performance and rugged design. They can withstand up to 500mA of reverse current (either polarity) without latching and up to 5V noise spikes (either polarity) on ground pins. Primarily intended for driving power MOSFETs, MIC4426/7/8 drivers are suitable for driving other loads (capacitive, resistive, or inductive) which require low-impedance, high peak current, and fast switching time. Other applications include driving heavily loaded clock lines, coaxial cables, or piezoelectric transducers. The only load limitation is that total driver power dissipation must not exceed the limits of the package. Note See MIC4126/4127/4128 for high power and narrow pulse applications.

Key Features

Bipolar/CMOS/DMOS construction

Latch-up protection to >500mA reverse current

1.5A peak output current

4.5V to 18V operating range

Low quiescent supply current

4mA at logic 1 input

400 μ A at logic 0 input

Switches 1000pF in 25ns

Matched rise and fall times

7 Ω output impedance

Logic-input threshold independent of supply voltage

Logic-input protection to -5V


6pF typical equivalent input capacitance

25mV max. output offset from supply or ground

Replaces MIC426/427/428 and MIC1426/1427/1428

Dual inverting, dual noninverting, and inverting/noninverting configurations

ESD protection

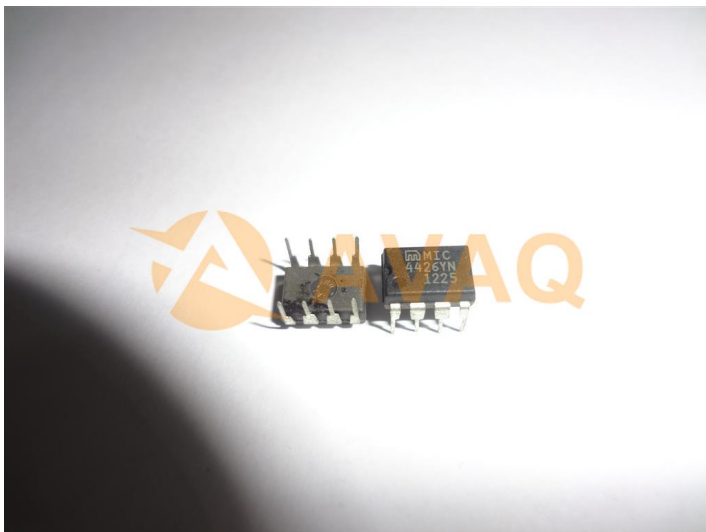

Recommended For You

MIC4451YN

Microchip Technology, Inc
DIP8

MIC4427YN

Microchip Technology, Inc
DIP8

MIC4427YM

Microchip Technology, Inc
SOP-8

MIC2954-02WS

Microchip Technology, Inc
SOT223

MIC2951-02YM

Microchip Technology, Inc
SOP-8

MIC4452ZT

Microchip Technology, Inc
TO-220-5

MIC5013YN

Microchip Technology, Inc
PDIP-8

MIC2582-MYM

Microchip Technology, Inc
SOP-8

MIC4224YM

Microchip Technology, Inc
SOP8

MIC4123YME

Microchip Technology, Inc
SOP-8

MIC2951-02YM-TR

Microchip Technology, Inc
SOIC-8

MIC4422ZM

Microchip Technology, Inc
SOP8

MIC49150WR

Microchip Technology, Inc
SPAK-5

MIC2506YM

Microchip Technology, Inc
SOP-8

MIC49300WR

Microchip Technology, Inc
S-PAK-5