
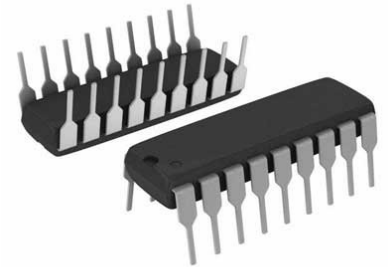


Voltage Mode PWM Controller 100mA 550kHz 18-Pin PDIP Tube

Manufacturer:	Texas Instruments, Inc
Package/Case:	DIP18
Product Type:	Power Management ICs
RoHS:	RoHS Compliant/Lead free 
Lifecycle:	Active



Images are for reference only

Inquiry

General Description

The UC1526A Series are improved-performance pulse-width modulator circuits intended for direct replacement of equivalent non- $\times 93A \times 94$ versions in all applications. Higher frequency operation has been enhanced by several significant improvements including: a more accurate oscillator with less minimum dead time, reduced circuit delays (particularly in current limiting), and an improved output stage with negligible cross-conduction current. Additional improvements include the incorporation of a precision, band-gap reference generator, reduced overall supply current, and the addition of thermal shutdown protection. Along with these improvements, the UC1526A Series retains the protective features of under-voltage lockout, soft-start, digital current limiting, double pulse suppression logic, and adjustable deadtime. For ease of interfacing, all digital control ports are TTL compatible with active low logic. Five volt (5V) operation is possible for $\times 93 \text{logic level} \times 94$ applications by connecting VIN, VC and VREF to a precision 5V input supply. Consult factory for additional information.

Key Features

Reduced Supply Current

Oscillator Frequency to 600kHz

Precision Band-Gap Reference

7 to 35V Operation

Dual 200mA Source/Sink Outputs

Minimum Output Cross-Conduction

Double-Pulse Suppression Logic

Under-Voltage Lockout

Programmable Soft-Start

Thermal Shutdown

TTL/CMOS Compatible Logic Ports

5 Volt Operation ($V_{IN} = V_C = V_{REF} = 5.0V$)

Description

The UC1526A Series are improved-performance pulse-width modulator circuits intended for direct replacement of equivalent non- $\times 93A \times 94$ versions in all applications. Higher frequency operation has been enhanced by several significant improvements including: a more accurate oscillator with less minimum dead time, reduced circuit delays (particularly in current limiting), and an improved output stage with negligible cross-conduction current. Additional improvements include the incorporation of a precision, band-gap reference generator, reduced overall supply current, and the addition of thermal shutdown protection.

Along with these improvements, the UC1526A Series retains the protective features of under-voltage lockout, soft-start, digital current limiting, double pulse suppression logic, and adjustable deadtime. For ease of interfacing, all digital control ports are TTL compatible with active low logic.

Five volt (5V) operation is possible for $\times 93$ logic level $\times 94$ applications by connecting V_{IN} , V_C and V_{REF} to a precision 5V input supply. Consult factory for additional information.

Recommended For You

UCC28064ADR

Texas Instruments, Inc

SOP16

UC3637N

Texas Instruments, Inc

DIP-18

UCC27517DBVR

Texas Instruments, Inc

SOT23-5

UCC2946IPWRQ1

Texas Instruments, Inc

TSSOP8

UCC28730QDRQ1

Texas Instruments, Inc

SOP7

UCC21222QDRQ1

Texas Instruments, Inc

SOP16

UCD9090QRGZRQ1

Texas Instruments, Inc

VQFN-48

UCC27531QDBVRQ1

Texas Instruments, Inc

SOT23-6

UCC27511AQDBVRQ1

Texas Instruments, Inc

SOT23-6

UCC2803QDRQ1

Texas Instruments, Inc
SOP8

UCC28951QPWRQ1

Texas Instruments, Inc
TSSOP24

UCC21320QDWKRQ1

Texas Instruments, Inc
SOIC-14

UCC27322QDGNRQ1

Texas Instruments, Inc
HVSSOP-8

UCC28950QPWRQ1

Texas Instruments, Inc
TSSOP24

UCC2808AQDR-2Q1

Texas Instruments, Inc
SOP8