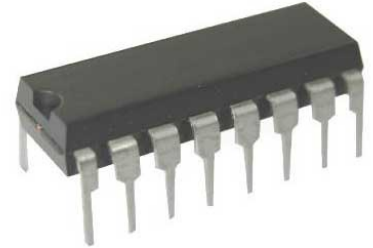


**Current Mode PWM Controller 2A 1000kHz 16-Pin PDIP
Tube****Manufacturer:** [Texas Instruments, Inc](#)**Package/Case:** DIP16**Product Type:** Power Management ICs**RoHS:** RoHS Compliant/Lead free **Lifecycle:** Active

Images are for reference only

[Inquiry](#)**General Description**

The UC1825 family of PWM control ICs is optimized for high frequency switched mode power supply applications. Particular care was given to minimizing propagation delays through the comparators and logic circuitry while maximizing bandwidth and slew rate of the error amplifier. This controller is designed for use in either current-mode or voltage mode systems with the capability for input voltage feed-forward.

Protection circuitry includes a current limit comparator with a 1V threshold, a TTL compatible shutdown port, and a soft start pin which will double as a maximum duty cycle clamp. The logic is fully latched to provide jitter free operation and prohibit multiple pulses at an output. An under-voltage lockout section with 800mV of hysteresis assures low start up current. During under-voltage lockout, the outputs are high impedance.

These devices feature totem pole outputs designed to source and sink high peak currents from capacitive loads, such as the gate of a power MOSFET. The on state is designed as a high level.

Key Features

Improved Versions of the UC3823/UC3825 PWMs

Compatible with Voltage-Mode or Current-Mode Control Methods

Practical Operation at Switching Frequencies to 1 MHz

50-ns Propagation Delay to Output

High-Current Dual Totem Pole Outputs (2-A Peak)

Trimmed Oscillator Discharge Current

Low 100- μ A Startup Current

Pulse-by-Pulse Current Limiting Comparator

Latched Overcurrent Comparator With Full Cycle Restart

Description

The UC3823A and UC3823B and the UC3825A and UC3825B family of PWM controllers are improved versions of the standard UC3823 and UC3825 family. Performance enhancements have been made to several of the circuit blocks. Error amplifier gain bandwidth product is 12 MHz, while input offset voltage is 2 mV. Current limit threshold is assured to a tolerance of 5%. Oscillator discharge current is specified at 10 mA for accurate dead time control. Frequency accuracy is improved to 6%. Startup supply current, typically 100 μ A, is ideal for off-line applications. The output drivers are redesigned to actively sink current during UVLO at no expense to the startup current specification. In addition each output is capable of 2-A peak currents during transitions. Functional improvements have also been implemented in this family. The UC3825 shutdown comparator is now a high-speed overcurrent comparator with a threshold of 1.2 V. The overcurrent comparator sets a latch that ensures full discharge of the soft-start capacitor before allowing a restart. While the fault latch is set, the outputs are in the low state. In the event of continuous faults, the soft-start capacitor is fully charged before discharge to insure that the fault frequency does not exceed the designed soft start period. The UC3825 CLOCK pin has become CLK/LEB. This pin combines the functions of clock output and leading edge blanking adjustment and has been buffered for easier interfacing.

The UC3825A and UC3825B have dual alternating outputs and the same pin configuration of the UC3825. The UC3823A and UC3823B outputs operate in phase with duty cycles from zero to less than 100%. The pin configuration of the UC3823A and UC3823B is the same as the UC3823 except pin 11 is now an output pin instead of the reference pin to the current limit comparator. "A" version parts have UVLO thresholds identical to the original UC3823 and UC3825. The "B" versions have UVLO thresholds of 16 V and 10 V, intended for ease of use in off-line applications.

Consult the application note, The UC3823A,B and UC3825A,B Enhanced Generation of PWM Controllers, (SLUA125) for detailed technical and applications information.

Recommended For You

UCC28064ADR

Texas Instruments, Inc
SOP16

UC3637N

Texas Instruments, Inc
DIP-18

UCC27517DBVR

Texas Instruments, Inc
SOT23-5

UCC2946TPWRQ1

Texas Instruments, Inc
TSSOP8

UCC28730QDRQ1

Texas Instruments, Inc
SOP7

UCC21222QDRQ1

Texas Instruments, Inc
SOP16

UCD9090QRGZRQ1

Texas Instruments, Inc
VQFN-48

UCC27531QDBVRQ1

Texas Instruments, Inc
SOT23-6

UCC27511AQDBVRQ1

Texas Instruments, Inc
SOT23-6

UCC2803QDRQ1

Texas Instruments, Inc
SOP8

UCC28951QPWRQ1

Texas Instruments, Inc
TSSOP24

UCC21320QDWKRQ1

Texas Instruments, Inc
SOIC-14

UCC27322QDGNRQ1

Texas Instruments, Inc
HVSSOP-8

UCC28950QPWRQ1

Texas Instruments, Inc
TSSOP24

UCC2808AQDR-2Q1

Texas Instruments, Inc
SOP8