

TVS Diode Single Uni-Dir 16V 400W 2-Pin SMA T/R

Manufacturer: [Littelfuse Inc](#)

Package/Case: SMA

Product Type: Thyristors

Lifecycle: Active



Images are for reference only

[Inquiry](#)

General Description

VOLTAGE 5.0 TO 250 Volts 400 Watt Peak Pulse Power

Key Features

Halogen-Free and RoHS compliant

For surface mounted applications in order to optimize board space

Low profile package

Built-in strain relief

Glass passivated junction

Low Inductance

Excellent clamping capability


Repetition Rate (duty cycle): 0.01%

Fast response time: typically less than 1.0ps from 0 Volts to V(BR) for unidirectional types.

Typical IR less than 1mA above 10V

High temperature soldering: 250 degrees C/10 seconds at terminals

Plastic package has Underwriters Laboratory Flammability 94V-O

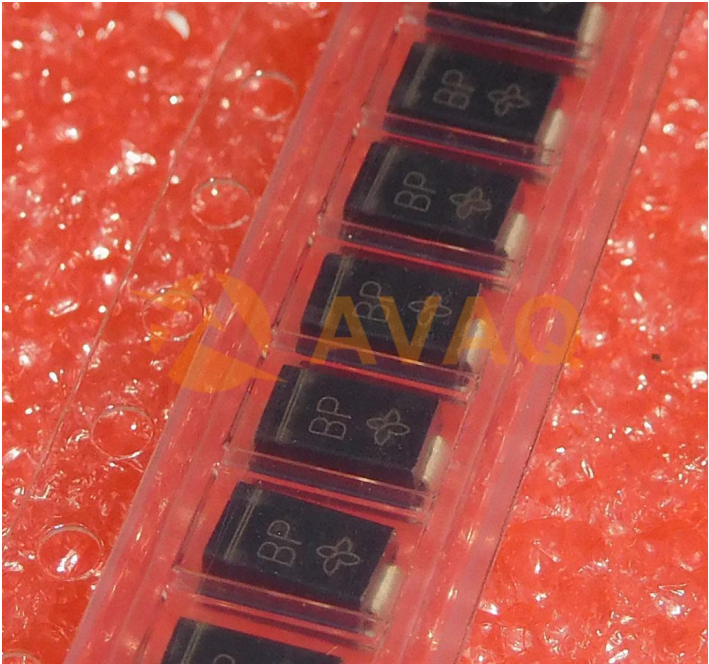

Recommended For You

SMAJ12A

Littelfuse Inc
SMA

SMAJ58CA

Littelfuse Inc
SMA

SMBJ22A

Littelfuse Inc
SMB

SMAJ30A

Littelfuse Inc
SMA

SMBJ30A

Littelfuse Inc
SMB

SMAJ24CA

Littelfuse Inc
DO-214AC

SMBJ18A

Littelfuse Inc
SMB

SMBJ24A

Littelfuse Inc
SMB

SMBJ36CA

Littelfuse Inc
SMB

SMAJ12CA

Littelfuse Inc
SMA

SMCJ30CA

Littelfuse Inc
SMC

SMAJ28CA

Littelfuse Inc
SMA

SMBJ26CA

Littelfuse Inc
SMB

SMBJ17A

Littelfuse Inc
SMB

SMBJ20A

Littelfuse Inc
SMB