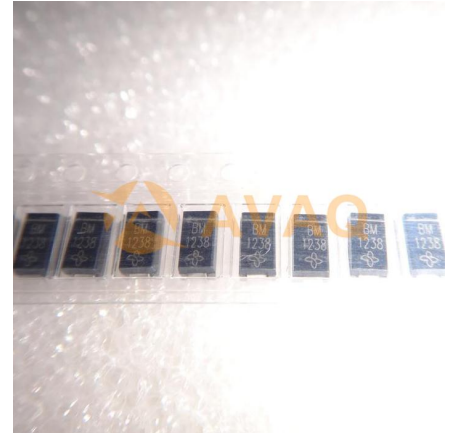


**TVS Diode Single Uni-Dir 15V 400W 2-Pin SMA T/R****Manufacturer:** [Littelfuse Inc](#)**Package/Case:** SMA**Product Type:** Thyristors**Lifecycle:** Active

Images are for reference only

[Inquiry](#)**General Description**

VOLTAGE 5.0 TO 250 Volts 400 Watt Peak Pulse Power

**Key Features**

Halogen-Free and RoHS compliant

For surface mounted applications in order to optimize board space

Low profile package

Built-in strain relief

Glass passivated junction

Low Inductance

Excellent clamping capability



Repetition Rate (duty cycle): 0.01%

Fast response time: typically less than 1.0ps from 0 Volts to V(BR) for unidirectional types.

Typical IR less than 1mA above 10V

High temperature soldering: 250 degrees C/10 seconds at terminals

Plastic package has Underwriters Laboratory Flammability 94V-O

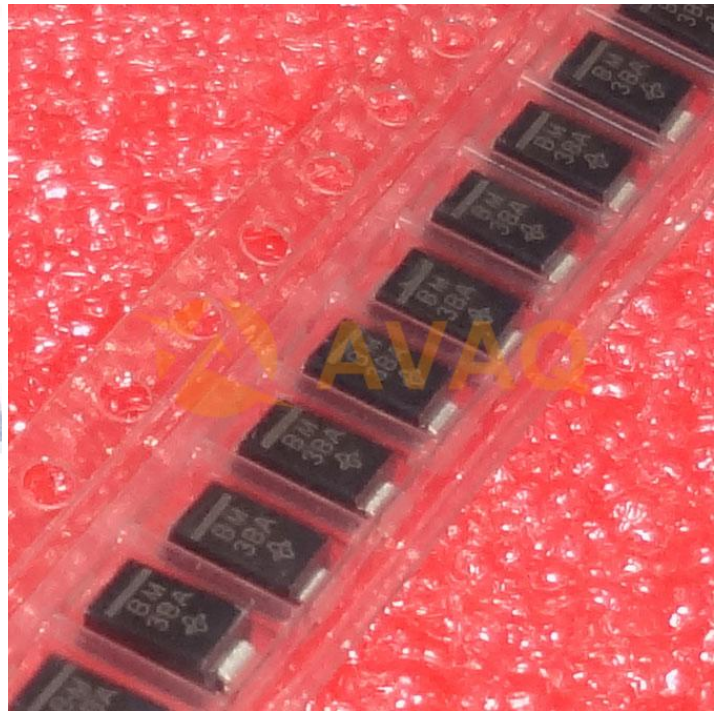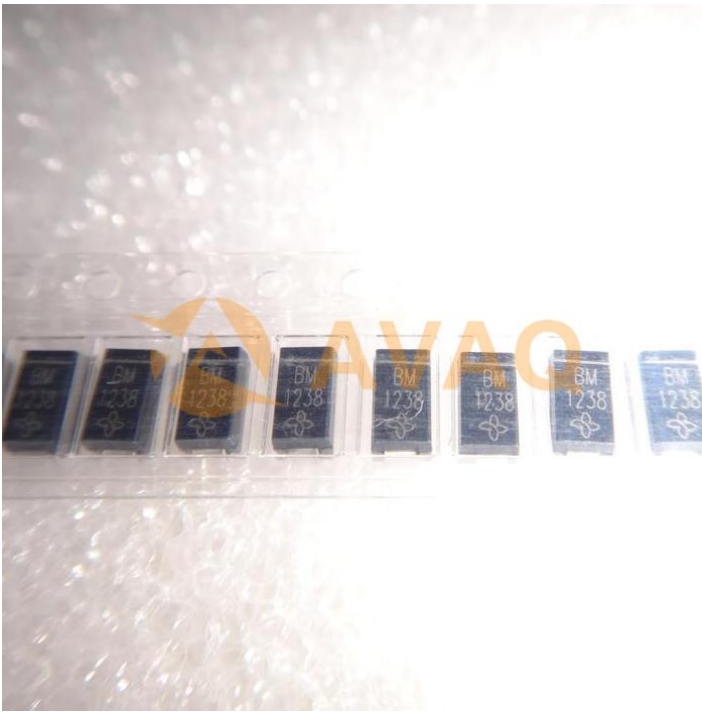

## Recommended For You

---

### SMAJ12A

Littelfuse Inc

SMA

### SMAJ58CA

Littelfuse Inc

SMA

### SMBJ22A

Littelfuse Inc

SMB

### SMAJ30A

Littelfuse Inc

SMA

### SMBJ30A

Littelfuse Inc

SMB

### SMAJ24CA

Littelfuse Inc

DO-214AC

### SMBJ18A

Littelfuse Inc

SMB

### SMBJ24A

Littelfuse Inc

SMB

### SMBJ36CA

Littelfuse Inc

SMB

### SMAJ12CA

Littelfuse Inc

SMA

### SMCJ30CA

Littelfuse Inc

SMC

### SMAJ28CA

Littelfuse Inc

SMA

### SMBJ26CA

Littelfuse Inc

SMB

### SMBJ17A

Littelfuse Inc

SMB

### SMBJ20A

Littelfuse Inc

SMB